

# ORDER FORM

**ORDER** e: roofsales@ultraframe.co.uk

**QUOTE** e: quotes@ultraframe.co.uk

New Build


Replacement Project

**Please sketch your Ultrasky lantern here.**

- Please note all dimensions are to external face of 70 mm timber kerb.

**PLAN VIEW**

example:



**ACCOUNT No.**

Company Name

Order Number

**JOB REFERENCE**

Company Contact

Telephone No.

Email

Delivery Address

**POSTCODE**

Delivery Date Req .....

Quotation Ref .....

**CRITICAL INFORMATION**

**\*Required for structural snow / wind loading**

\*Site Postcode

Please tick if height is greater than one storey.

Height above ground level.....

**CUSTOMER NOTE: Please carefully read the Ultrasky Lantern installation guide before filling in order details.**

**HOW TO PLACE AN ORDER FOR ULTRASKY LANTERN:**

1. Sketch plan & elevations.  
(If necessary, attach photos of existing property. Indicate on drawings if any part of project is existing).
2. Mark the preferred positions of any
  - a) roof windows
  - or b) rectangular glazed panels.
3. Upon placement of your Ultrasky Lantern order, an order confirmation is generated which must be signed and emailed back.

Job No.:3598

Please sign and return to  
roofsales@ultraframe.co.uk

SIGNED

DATE

# ORDER FORM

**JOB REFERENCE** .....

**ROOF MATERIALS**

PVCu White	PVCu Painted Grey	PVCu Black	Aluminium 9003 White 80% gloss	Aluminium 7016 Grey 30% gloss	Aluminium 9005 Black 60% gloss
------------	-------------------	------------	--------------------------------	-------------------------------	--------------------------------

External

Internal

Bespoke Colour

External

.....

Internal

.....

**ROTABOND SEALANT - MS POLYMER**

Black (NCGS001B)	No. Tubes Req:	N.B. For use with glass
------------------	----------------	-------------------------

**GLASS OPTIONS - WARM EDGE SPACER**

Conservaglass	Ultra86 Blue Bronze 4S	Ultimate Blue	Blue 4S	Neutral 4S	Aqua 4S
Celsius	Celsius One Unglazed	Celsius Elite	Celsius Clear		


**ROOF VENTS AND MECHANISM (mark plan)**

PVCu Internal Cladding	Aluminium Internal Cladding		
Brass	Manual Spindle	Manual Spindle and pole	Manual Spindle and telescopic pole
Chrome	Manual Spindle	Manual Spindle and pole	
Electric motor with digital thermostat and rain sensor	Electric motor and rocker switch		
Electric motor with radio and remote control	Electric motor with thermostat (AVTD002)		
Electric without switch/thermostat (Motor only)			

**ANCILLARY EXTRAS**

**SPECIFICATION**

1. Set out is always measured to external face of timber kerb.
2. Timber kerb should be a minimum of 150 mm x 70 mm wide (not supplied).
3. Width up to 4000 mm. Length up to 6000 mm - nominal sizes (4000X5851 Ext kerb sizes).
4. Fixed pitch of 25 degree all round.
5. Double ended hipped (rectangle shape).
6. Supplied glazed or unglazed for 24 mm sealed units - glazing overhangs, no gutter.
7. We will always design with the minimum number of bars - if you require additional and specific bars, please mark on drawing above.

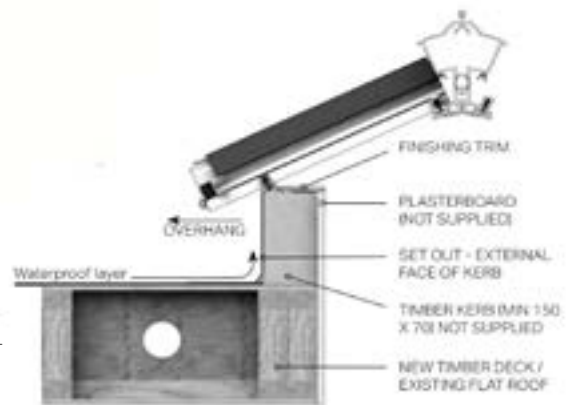

**DISCLAIMER**

The builder/installer is responsible for providing / checking structural timber deck. Building Regulation applications MAY be needed depending upon application. In certain commercial applications, restrictions in the use of the product may apply. Contact 01200 452918 for guidance.

You will need to follow the below specification in regards to glass U-value in order to pass building regulations. Please refer to the Thermal Design Guide in Udesign for a confirmed U-value of each product.

- If your lantern is less than 750mm (w) – 0.9 U-value or less glass is required.
- If your lantern is between 750mm to 1000mm (w) – At least 1.0 U-value glass is required.
- If your lantern is larger than 1000mm (w) – At least 1.2 U-value glass is required.

**NOTE: 2 weeks lead time from signed confirmation on Black Ali or painted PVCu Lantern and coloured roof vents.**

Job No.:3598

Please sign and return to

roofsales@ultraframe.co.uk

SIGNED

DATE