

ORDER FORM

ORDER e: roofsales@ultraframe.co.uk

QUOTE e: quotes@ultraframe.co.uk

PLEASE SKETCH YOUR PREFERRED DESIGN HERE

- mark window, door & wall positions/types.

INDICATE ON DRAWINGS IF ANY PART OF THE PROJECT IS EXISTING

DIMENSIONS Internal frame to internal frame

ROOF U-VALUE: 0.15 (standard) 0.12 (thermally enhanced)

PLAN VIEW

ACCOUNT No.

Company Name

Order Number

JOB REFERENCE

Company Contact

Telephone No.

Email

Delivery Address

POSTCODE

Delivery Date Req

Quotation Ref

CRITICAL INFORMATION

***Required for structural snow / wind loading**

Site Postcode

Roof Pitch

FRONT ELEVATION

CUSTOMER NOTE: Please carefully read the Ultrarroof Complete Guide to Selling, Surveying and Specifying before filling in order details.

HOW TO PLACE AN ORDER FOR ULTRAROOF:

1. Sketch plan & elevations.
(If necessary, attach photos of existing property. Indicate on drawings if any part of project is existing).
2. Mark and caption the positions of all walls, brick piers, windows/doors, cut outs / intrusions.
3. Mark the preferred positions of any
 - a) roof windows (vents) or velux
 - b) rectangular glazed panels.
4. Upon placement of your Ultrarroof order, an order confirmation is generated which must be signed and emailed back.

NOTES:

Please see p29 of Ultrarroof guide to selling, surveying and specifying for list of what IS / IS NOT included

LEFT ELEVATION

RIGHT ELEVATION

Please sign and return to
roofsales@ultraframe.co.uk

SIGNED

DATE

ORDER FORM

JOB REFERENCE

TILE COLOUR

Carbon grey Harvest brown Terra brick

RIDGE / CAPS COLOUR

Grey Red Brown

GUTTER

White Black Grey Brown Caramel

SOFFIT

White Black Grey Rosewood Light Oak

DOWNPIPE

Round Square
 White Black Grey Brown Caramel

CORNICE (Curved ONLY)

Yes Grey White

FRAME STIFFENER (Always supplied* on gable roofs, recommend on lean-to's above door sets - please confirm frame colour)

Yes No Internal colour External colour

STRUCTURAL GALLOWS BRACKET FOR BOX BEAM

(if design needs one, check survey guide)

QTY

GABLE BOLSTER

(If ticked, please confirm frame colour)

To be specified if there are any doors in the gable.

Soffit size (if there is one)

GLASS OPTIONS - (Please note: tiles under glass are grey. *Glazing panels must be rectangular)

	Tier 4	Tier 3	Tier 2	Tier 1		
Conservaglass	<input type="checkbox"/> Ultra86 Blue	<input type="checkbox"/> Ultimate Blue	<input type="checkbox"/> Blue 4S <input type="checkbox"/> Neutral 4S	<input type="checkbox"/> Bronze 4S <input type="checkbox"/> Aqua 4S	<input type="checkbox"/> Std Blue <input type="checkbox"/> Std Neutral	<input type="checkbox"/> Std Bronze <input type="checkbox"/> Std Aqua
Celsius	<input type="checkbox"/> Celsius Elite	<input type="checkbox"/> Celsius One	<input type="checkbox"/> Celsius Clear			
	<input type="checkbox"/> Unglazed for 24mm units					

VELUX ROOF WINDOW (Velux windows not supplied. Velux products not included in price)

Please indicate positions on plan. NOTE: Ensure a Velux EDL flashing kit is ordered for each Velux window (not supplied).

CK01 CK02 CK04 CK06

ROOF VENTS AND MECHANISM (mark plan)

Brass Manual Spindle Manual Spindle and pole Manual Spindle and telescopic pole

Chrome Manual Spindle Manual Spindle and pole

Electric motor with digital thermostat and rain sensor Electric motor and rocker switch
 Electric motor with radio and remote control Electric motor with thermostat (AVTD002)
 Electric without switch/thermostat (Motor only)

ANCILLARY EXTRAS

The installer is responsible for ensuring that where Ultrarroof is supported by means such as masonry or timber/ PVCu frame walls, the structure provides enough lateral support and resistance to wind uplift. Further guidance can be obtained through Ultrarroof's technical documentation/guides. Ultraframe is not responsible for the structural adequacy of any existing building work used as part of an overall project. Whilst assistance is provided ultimate responsibility for securing Building Regulations lies with the retail installer.

For further guidance please contact the Technical Support Team on
01200 452918 or email techsupport@ultraframe.co.uk

Job No. 3598 / Page 2 of 6

Please sign and return to







roofsales@ultraframe.co.uk

SIGNED

DATE

ORDER FORM

JOB REFERENCE

		Soffit Relative to EXTERNAL BRICK (300mm Cavity wall)	SOFFIT RELATIVE TO EXTERNAL FRAME (70MM FRAMES)	Tick option used for this roof
Standard Soffit on frames		N/A	40mm	
Extended Soffit on frames		N/A	151.5mm	
Brick Option 1 aligns roof with inner leaf of 300mm wall		94mm	126.5mm	
Brick Option 2 ONLY used when roof is on a boundary wall		-190mm	40mm	
Brick Option 3 Maintains 40mm soffit relative to frame		7.5mm	40mm	
Brick Option 4 Maintains 40mm soffit relative to brick		40mm	72.5mm	

Please sign and return to

roofsales@ultraframe.co.uk

SIGNED

DATE

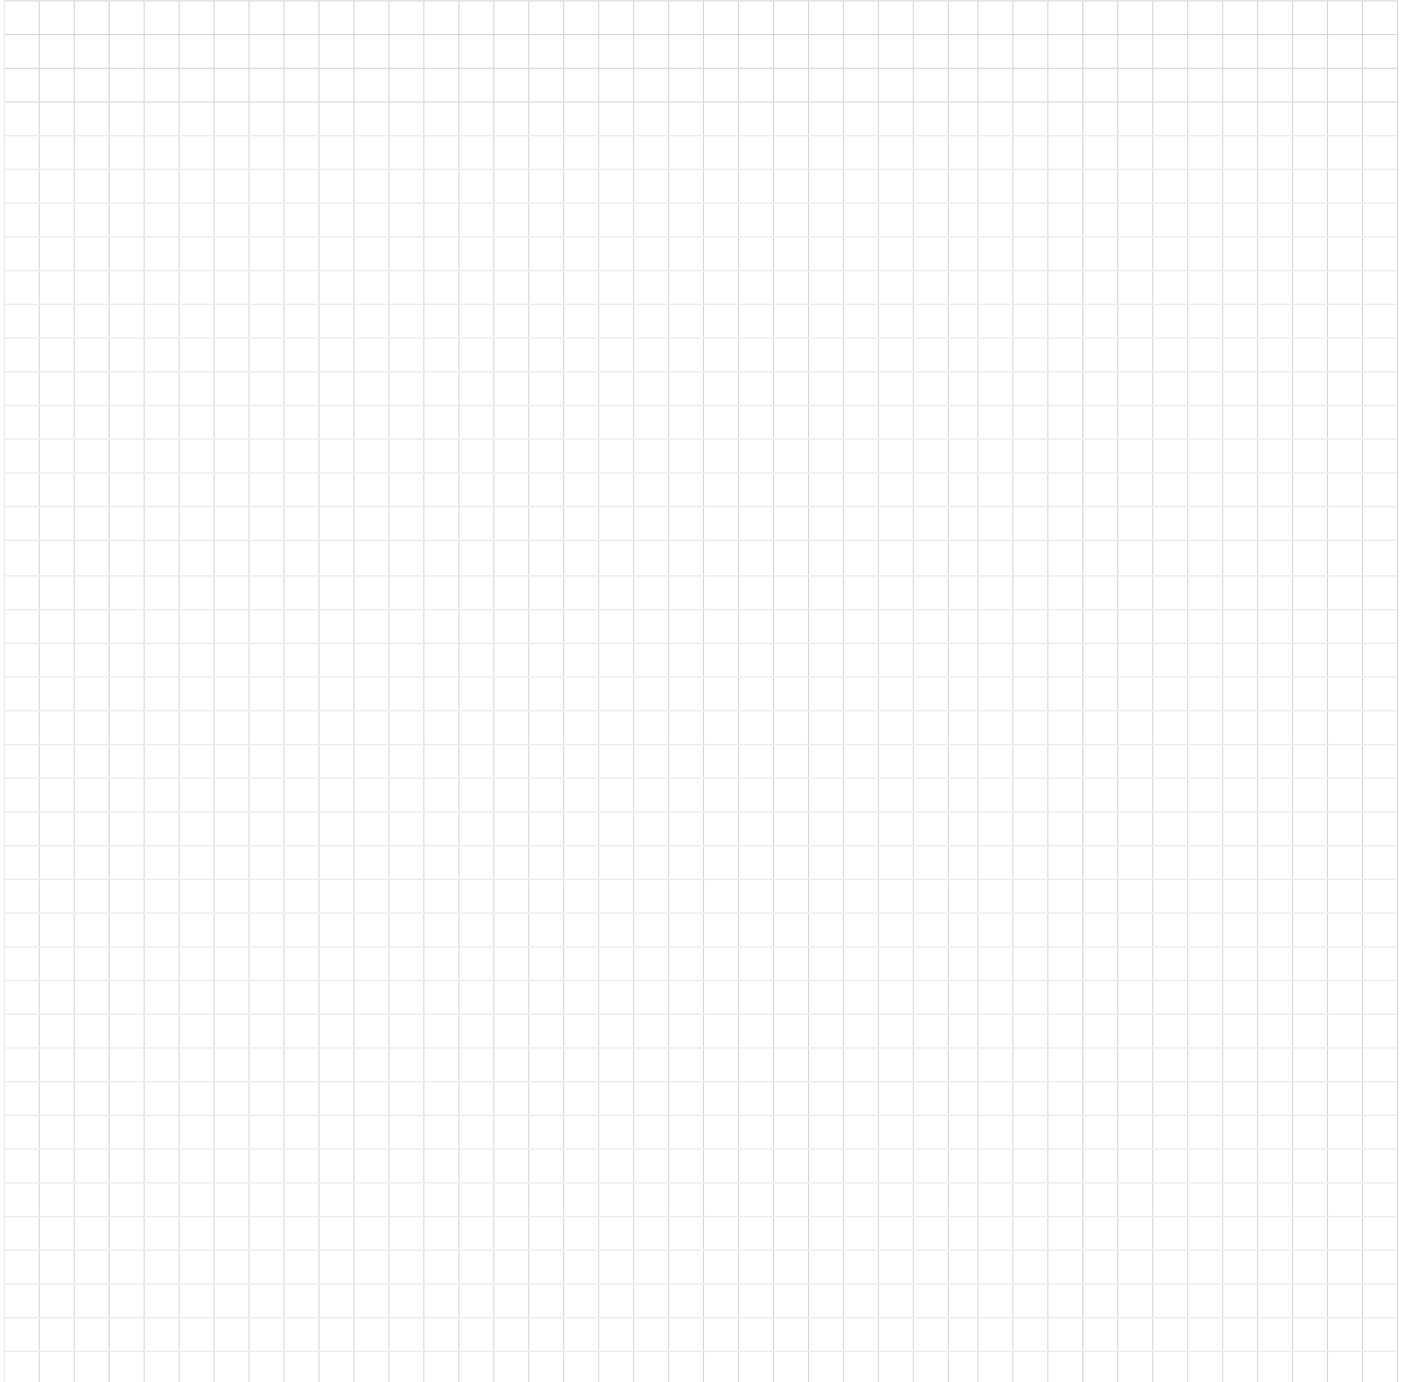
Order Form

Tick this box if you would like to order hup! walls with your roof

hup! Wall Specification:

1. Footprint

Please draw the footprint of your building marking each elevation A, B, C, D etc. You should **use the base datum** which lines up with the external of the Ultrapanel clips - wall finishes and battens will overhang the base. See specification guide for more details.



Please note hup! walls will protrude at least 48mm (3mm for membrane and clips, 25mm for battens and 20mm for claddings) outside of your base so that the wall finishes (claddings) will be ventilated. All critical dimensions will be confirmed before order stage.

Order Form

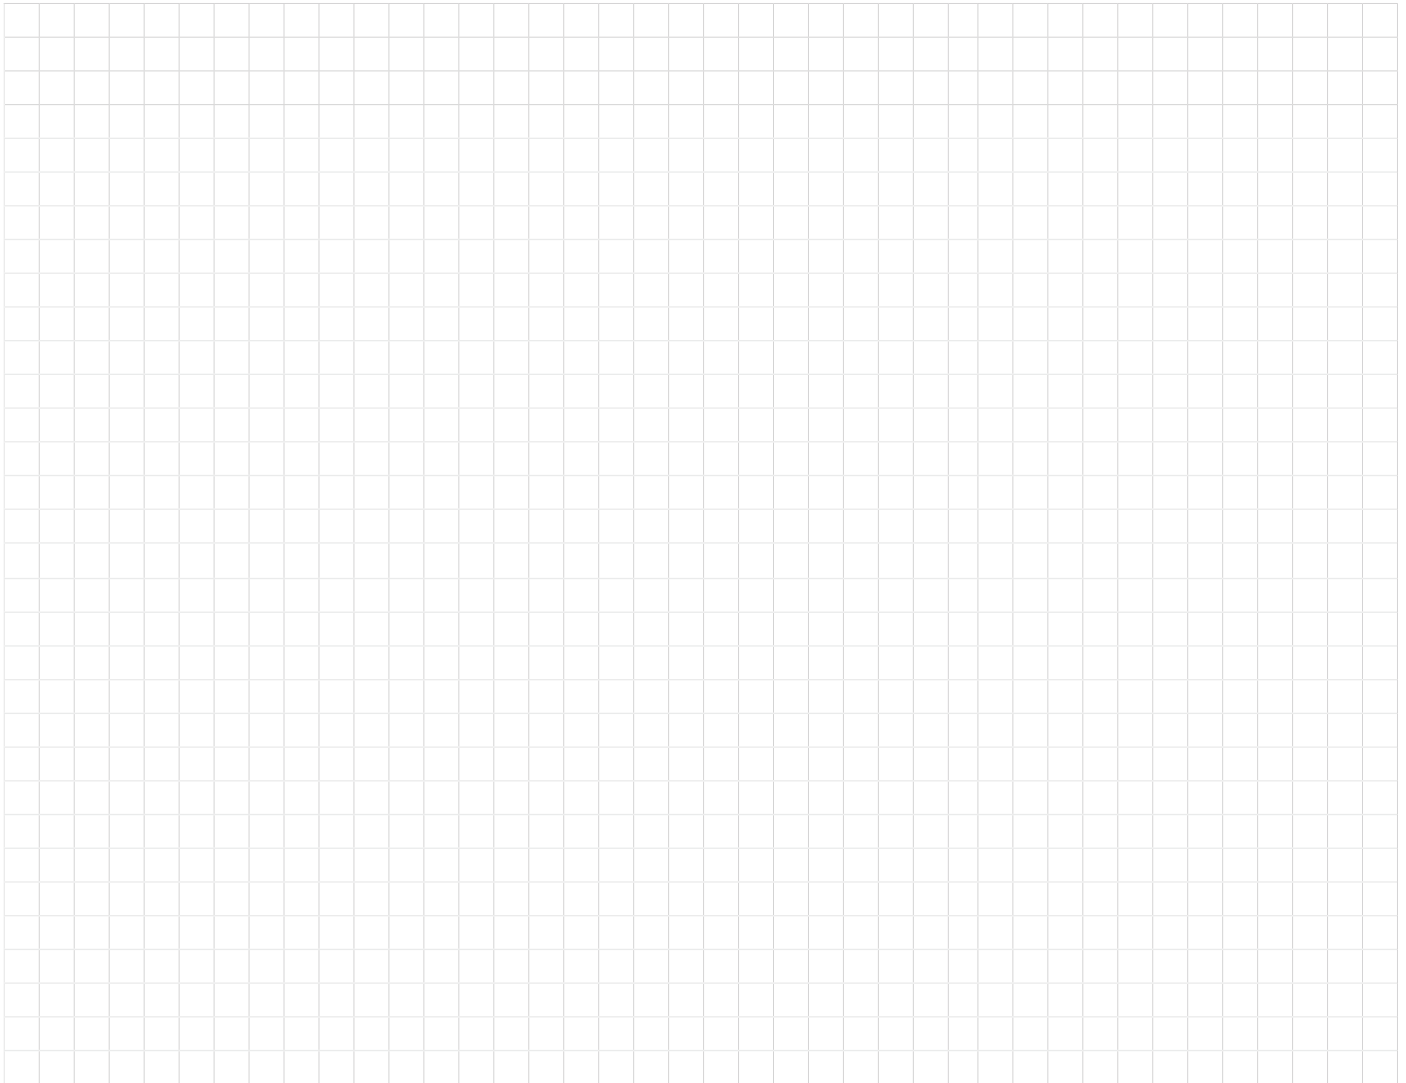


2. Elevations

Please draw each elevation of your hup! walls marking the elevations clearly with A, B, C, D etc. Include window and doors sizes and distance from the eaves as well as the floor clearly.

Tick this box if you require the cable management panel which is supplied on all panels.

Order Form



3. Wall Finishes (Claddings)

Circle which elements of the walling kit you will require to be supplied by Ultraframe

- None - I am supplying my own
- Ventilation trim only
- Aperture trim only
- Batten kit (includes battens and fixings)
- Render Board kit (includes ventilation trim, aperture trims and battens)
- Brick Mesh (includes trims, battens and render board)

Brick Mesh Specification:

- Grey Brick/Medium mortar
- Multi Buff/Medium mortar
- Warm Buff/Medium mortar
- Terracotta/Medium mortar
- Multi Red/Medium mortar
- Multi Orange/Medium mortar
- Grey Brick/Light mortar

- Multi Buff/Light mortar
- Warm Buff/Light mortar
- Terracotta/Light mortar
- Multi Red/Light mortar
- Multi Orange/Light mortar
- Grey Brick/Grey mortar
- Multi Buff/Grey mortar

Tick 'YES' if you need soldier courses above every window and door where there is space under the eaves. YES

Surveyor's Details

For the next 6 months, we will discuss every hup! order with the surveyor to ensure that it has been specified correctly, and therefore, avoid any potential errors on site. Please include your surveyor's details below.

NAME:

CONTACT NO:

EMAIL ADDRESS: